


TECHNICAL SPECIFICATIONS TEW5000

DIMENSIONS (mm)

Length	2100
Width	850
Height	830
Drum diameter	355
Drum length	750
Flange diameter	640

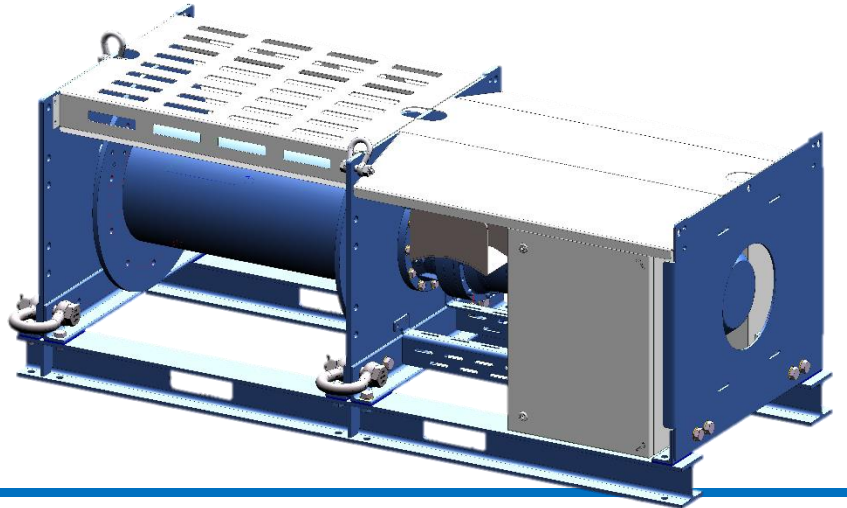

The TEW5000 is an electrically powered hoisting winch in a heavy duty frame with hoisting points and fork pockets. Frequency drive control, overload protection and temperature protection are standard. Optional supplied with pressure roller, limit switch, slack wire protection, levelwinder, grooved drum or constant tension mode.

Its wired remote control has a 8-metre-long cable for electrical supply, an emergency stop and a potentiometer for variable speed control. The WLL is 6.500 kg when used as a pulling winch. Many possibilities can be discussed, including tailor-made solutions.

SPECIFICATIONS

Working load 1st layer	6.500 kg
Working load 4th layer	5.000 kg
Hauling speed	1-12 m/min
Wire rope diameter	20 mm
Rope storage on 5 layers	250 m
Motor power	9,0 kW S2-25min
Motor protection class	IP56
Brake	Fail safe brake
Power supply	3-Ph 380-480V 50-60Hz 32A
Length of safety windings	3,5 m
Weight without rope	950 kg

